


Dryinject packer

Rubber and steel flat-head injection packer for pressure application of resins

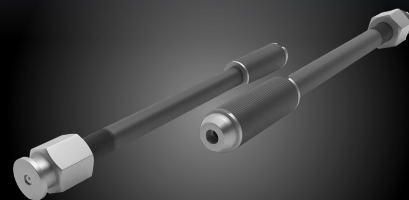

Drykos® **Dryinject Packer** are rubber and steel injectors designed for installation at cracks, fissures, joints, voids, cavities, and discontinuities to be waterproofed by injection of acrylic, epoxy, polyurethane resins, and cementitious grouts. They are particularly suitable for use with Drykos® **Dryinject 800** and Drykos® **Dryinject 2000**, hydro-reactive polyurethane resins formulated for rapid and immediate water infiltration stoppage, even under hydraulic pressure. Drykos® **Dryinject Packer** feature a flat head with non-return valve, allowing controlled and safe product injection while preventing unwanted backflow. For proper installation and effective injection operations, the injectors must be used in combination with the connection element Drykos® **Dryinject Packer Connector**.

NOTES

This "light" version of the technical data sheet provides a selection of the product's main descriptive and performance characteristics. While the data contained herein corresponds to our current scientific and technical knowledge, it is indicative and not exhaustive. For complete specifications, detailed technical information, conditions of use, and official updates, please refer exclusively to the full technical data sheet, available in its latest revision at www.drykos.com.

Full technical datasheet

