


PTB PVC Joint

PVC waterstop with central bulb for movement joints

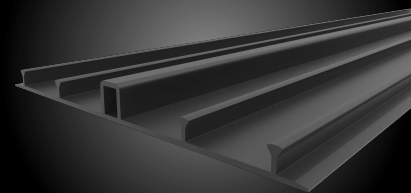

Drykos® **PTB PVC Joint** is a high-elasticity preformed PVC waterstop featuring a central bulb, designed for the waterproofing of expansion and movement joints with external application to the concrete pour. The product is manufactured by extruding high-quality thermoplastic vinyl resins, appropriately plasticized to ensure high mechanical strength, durability, and long-term stability even in aggressive environments. Thanks to the central bulb, it is capable of absorbing structural movements and dimensional variations, ensuring continuous hydraulic sealing.

TECHNICAL PERFORMANCE

Characteristic	Test method	Standard requirements	Performance
Shore A Hardness	ISO 868		75 ± 3
Specific gravity	ISO 1183		1.38 ± 0.02 kg/L
Tensile strength	ISO 527		12 ± 2 N/mm ²
Elongation at break	ISO 527		300 ± 3%
Low-temperature flexibility	ISO 458-2		-30 °C
Flammability	UL94		V-0
Oil resistance			Normal resistance in case of temporary contact; not suitable for long-term immersion

NOTES

This "light" version of the technical data sheet provides a selection of the product's main descriptive and performance characteristics. While the data contained herein corresponds to our current scientific and technical knowledge, it is indicative and not exhaustive. For complete specifications, detailed technical information, conditions of use, and official updates, please refer exclusively to the full technical data sheet, available in its latest revision at www.drykos.com.



Full technical datasheet



DRYKOS S.r.l.

Piazza Marconi n. 7 12100 - Tarantasca (CN) - Italia

Tel. + 39 0171 1874992 | E-mail info@drykos.com | Web www.drykos.com

Last update 27/03/2026